

CUT EXISTING PIPE AT SPRING LINE.
CHANNEL, PER DISTRICT STANDARDS
AFTER NEW LINE IS ACCEPTED.

CAST IN PLACE CHANNEL &
SHELF, 3000# PSI CONCRETE

BRICK UP IN MINIMUM
OF 5 LOCATIONS TO
SUPPORT MANHOLE.

12" MINIMUM


MIN. 8"

12" MIN FOUNDATION GRAVEL

UNDISTURBED EARTH, SEE
DETAIL G7 FOR UNSUITABLE
EXCAVATION

NOTES:

1. SEE STANDARD MANHOLE FOR
ADDITIONAL CALLOUTS ON S1.

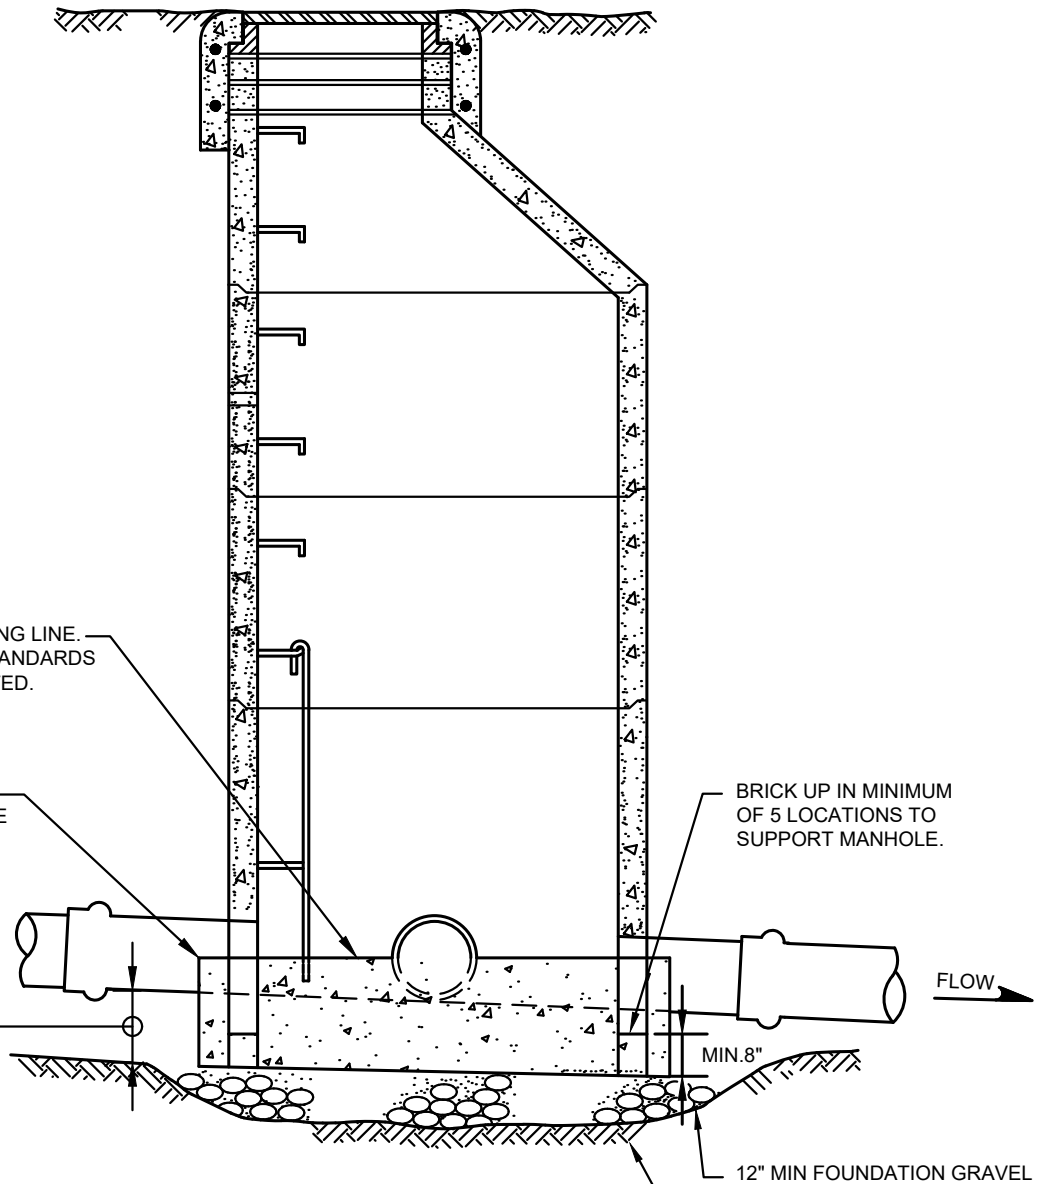

**SANITARY SEWER SADDLE
MANHOLE**

DATE: 11-2022

DWG: S3