

SURFACE RESTORATION
IN ACCORDANCE WITH
LOCAL JURISDICTION
REQUIREMENTS

TRENCH BACKFILL MATERIAL
PER LOCAL JURISDICTION
REQUIREMENTS

SPECIAL PRECAUTIONS TO
PROTECT PIPE TO THIS LEVEL

WATER OR SEWER MAIN
PIPE

PIPE BEDDING MATERIAL
SEE NOTES BELOW

FOUNDATION GRAVEL REQUIRED
ONLY UPON OVER EXCAVATING
OR UNSUITABLE MATERIALS.
SEE NEW UNSUITABLE
FOUNDATION EXCAVATION
DETAIL G-7.

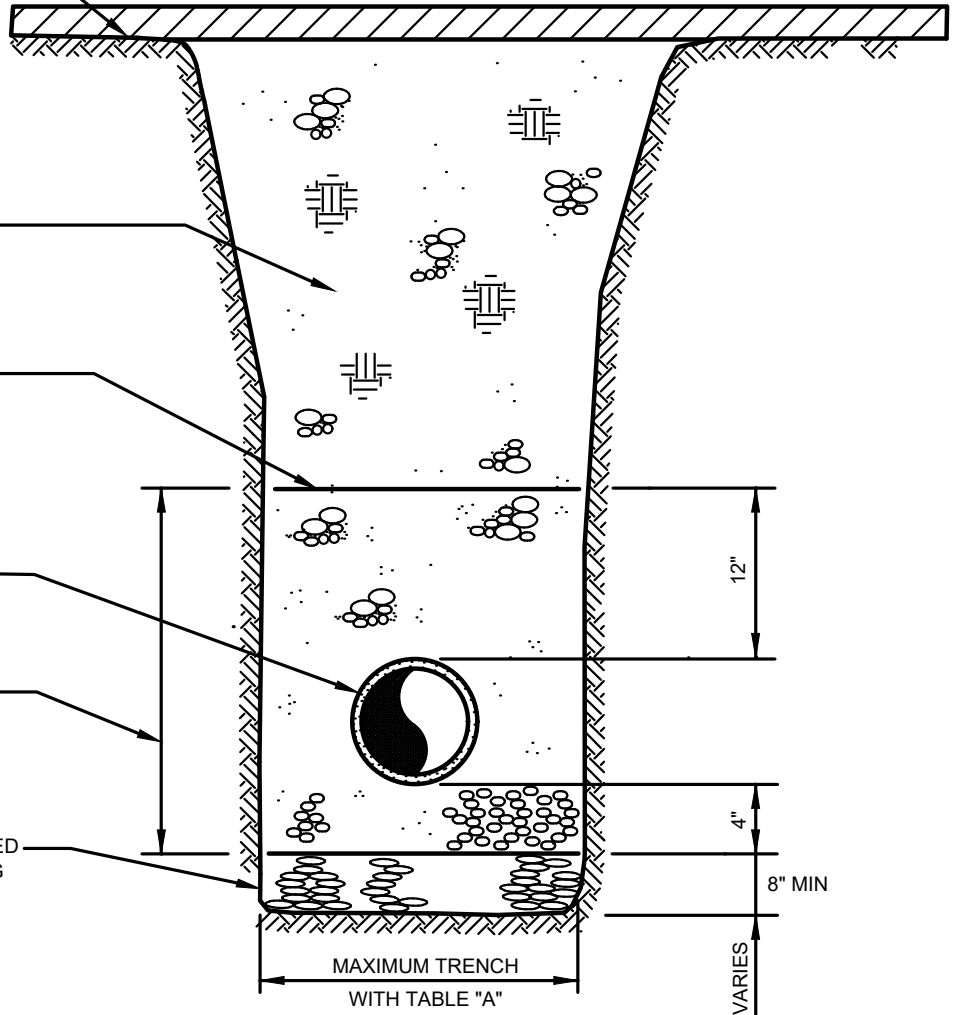



TABLE "A"

6"	PIPE	-2'-6"
8"	PIPE	-2'-6"
10"	PIPE	-3'-0"
12"	PIPE	-3'-0"
16"	PIPE	-3'-6"
18"	PIPE	-4'-0"
24"	PIPE	-4'-0"

NOTES:

1. ALSO SEE DETAILS G7 AND G9.
2. KEEP TRENCH BOTTOM COMPACTED WITH UNIFORM GRADE. NO TEMPORARY SUPPORTS I.E. BLOCKS, ALLOWED TO SUPPORT PIPE. TRENCH BOTTOM SHALL BE TO GRADE PRIOR TO PIPE INSTALLATION.
3. BEDDING MATERIAL:
SEWER - PEA GRAVEL
WATER - PEA GRAVEL OR WSDOT 9-03.12(3)
4. RECYCLED CONCRETE IS NOT ALLOWED FOR USE IN DISTRICT TRENCH SECTIONS, NO EXCEPTIONS.

SCALE: NTS



Silver Lake Water & Sewer District

**TRENCH SECTION PIPE BEDDING
AND TRENCH BACKFILL**

DATE: 11-2022	DWG: G6
---------------	---------